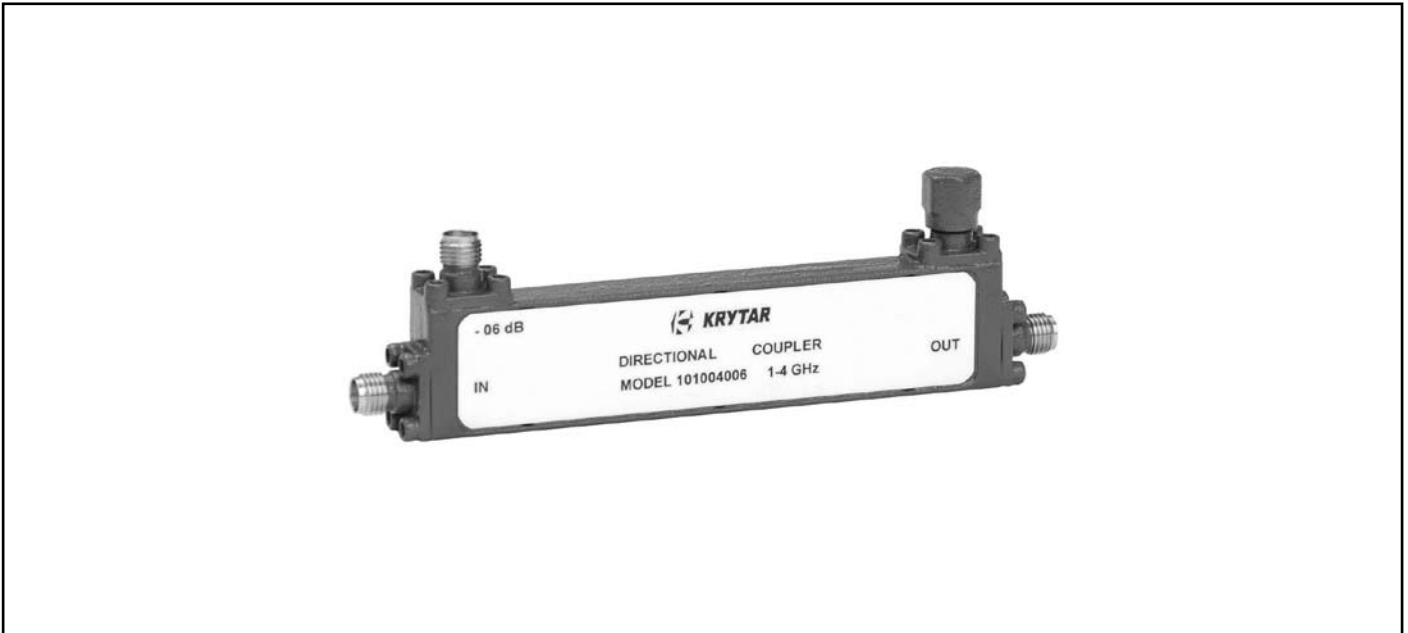


**1-4 GHz DIRECTIONAL COUPLER**

**SPECIFICATIONS**

<b>FREQUENCY RANGE</b>		1-4 GHz
<b>COUPLING</b> (with respect to output)		
Nominal	101004006	6 ± 0.5 dB
	101004010	10 ± 0.8 dB
	101004020	20 ± 0.5 dB
Frequency Sensitivity		± 0.5 dB
<b>DIRECTIVITY</b>		> 20 dB
<b>MAXIMUM VSWR</b> (any port)		1.2
<b>INSERTION LOSS</b>	101004006	< 1.3 dB
(includes coupled power)	101004010	< 1.0 dB
	101004020	< 0.8 dB
<b>POWER RATING</b> (input)		
Average		20 W
Peak		3 KW
<b>STANDARD CONNECTORS</b>		SMA Female
Optional:	N Female	
<b>WEIGHT</b> (ounces)		2.0
<b>OPERATING TEMPERATURE</b>		-54° to +85° C

**DIMENSIONS**
