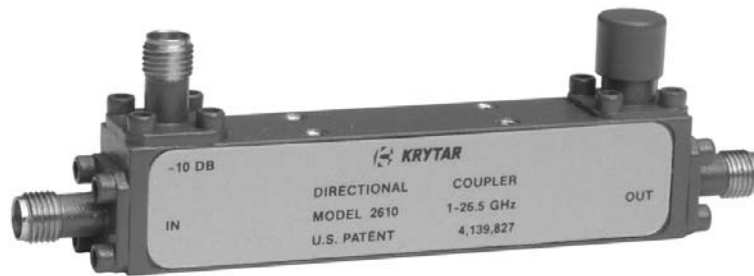


1.0-26.5 GHz DIRECTIONAL COUPLERS

SPECIFICATIONS

FREQUENCY RANGE		1.0-26.5 GHz
COUPLING (with respect to output)		
Nominal	2606	6 ± 1.0 dB
Frequency Sensitivity		± 0.7 dB
Nominal	2610	10 ± 1.0 dB
	2620	20 ± 1.0 dB
Frequency Sensitivity		± 0.5 dB
DIRECTIVITY	2606	> 13 dB
	2610	> 14 dB
	2620	> 14 dB
MAXIMUM VSWR (any port)	2606	1.50
	2610	1.40
	2620	1.40
INSERTION LOSS (includes coupled power)	2606	< 2.0 dB
	2610	< 1.6 dB
	2620	< 1.2 dB
POWER RATING (input)		
Average		20 W
Peak		3 KW
STANDARD CONNECTORS		3.5mm Female
Optional:	3.5mm Male	
WEIGHT (ounces)		2.1
OPERATING TEMPERATURE		-54° to +85° C

DIMENSIONS
