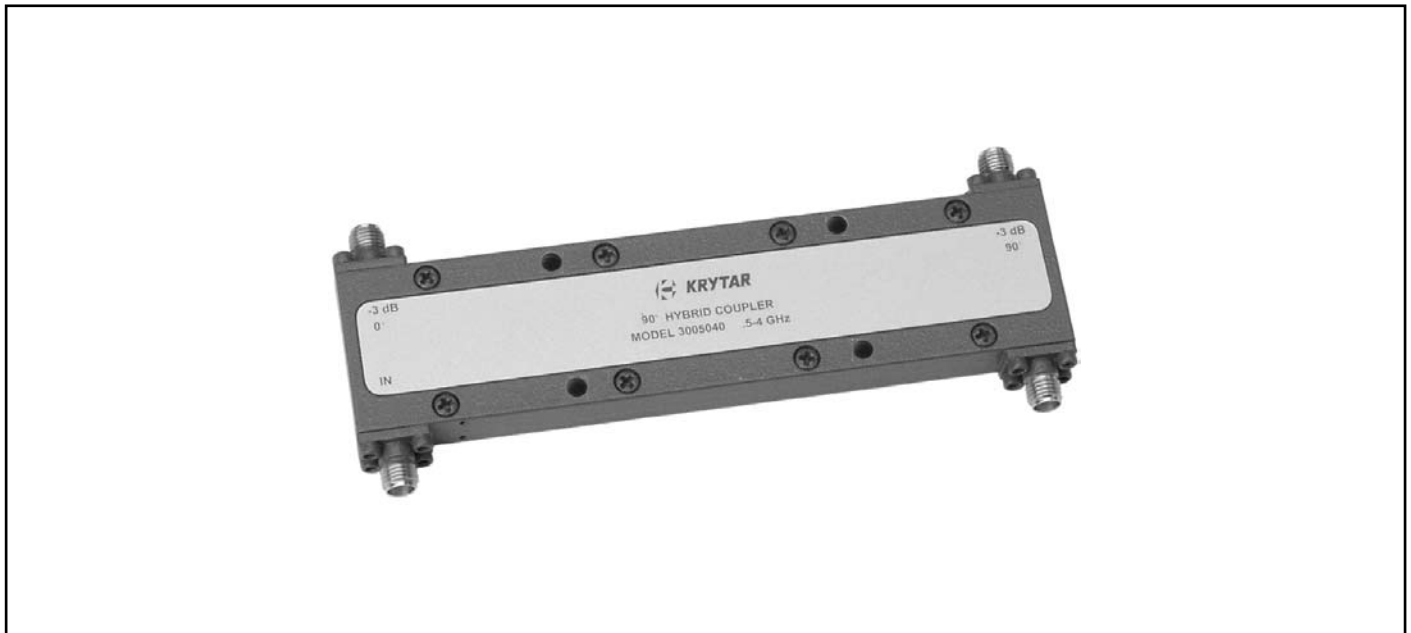


0.5-4.0 GHz 90° HYBRID COUPLER

SPECIFICATIONS

FREQUENCY RANGE	0.5-4.0 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.7 dB
PHASE IMBALANCE	± 5 Degrees
ISOLATION	> 18 dB
MAXIMUM VSWR	1.35
INSERTION LOSS	< 1.2 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	3.8
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS
