




**MODEL 4005070
DOUBLE ARROW**

0.5-7.0 GHz 180° HYBRID COUPLER

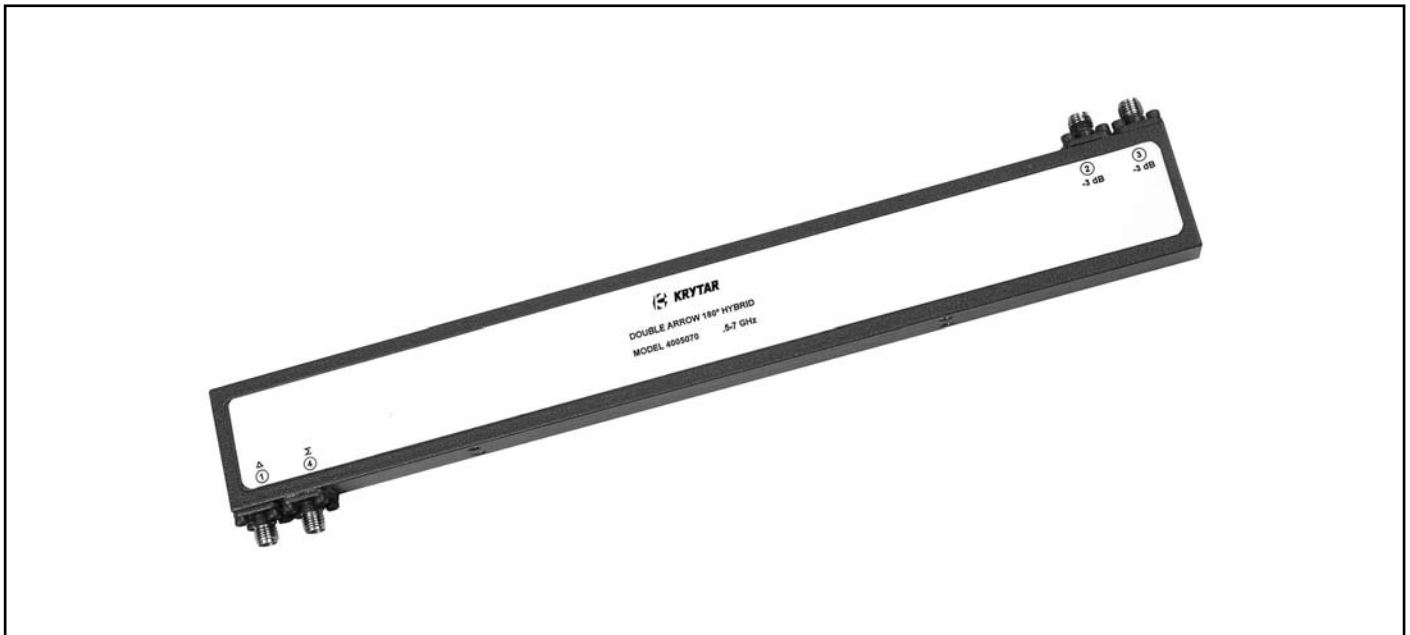


SPECIFICATIONS

FREQUENCY RANGE	0.5-7.0 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 0.6 dB
PHASE IMBALANCE *	± 10 Degrees
ISOLATION	> 16 dB
MAXIMUM VSWR	1.4
INSERTION LOSS	< 2.8 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	SMA Female
WEIGHT (ounces)	11.0
OPERATING TEMPERATURE	-54° to +85° C

* Units with a tighter phase imbalance specification can be supplied.

DIMENSIONS

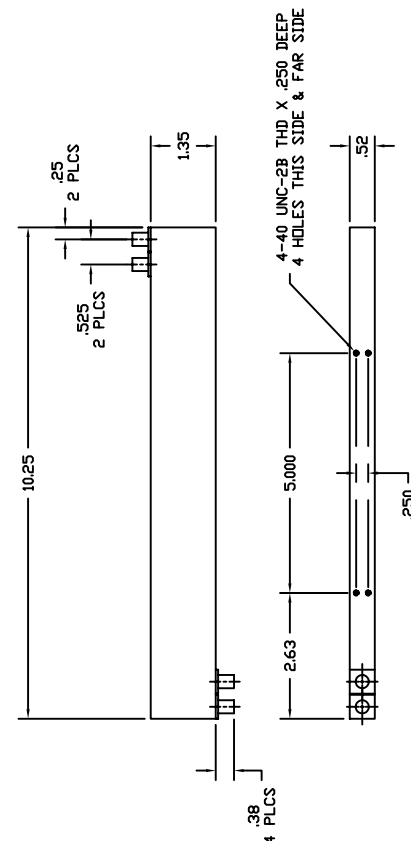

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com